


XT901 Quick Reference Guide

SkyTrack

Online tracking platform and reports available at login.skytrack.com.au

Email info@skytrack.com.au / Securitas Control Room 1300 656 660

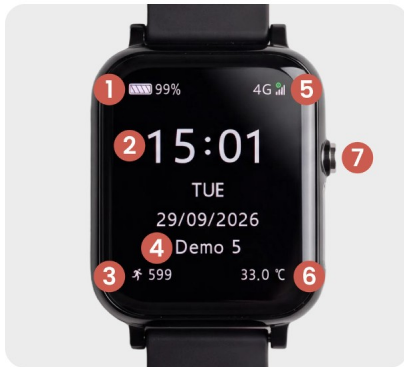


Everything at a glance

- 1 Battery Level
- 2 Time & Date
- 3 Daily Steps
- 4 Device Name


- 5 Telstra Connection
- 6 Internal Temp
- 7 Side Button

- Press and hold to turn watch on
- Press and hold to initiate SOS
- Press to wake, sleep, and return to home

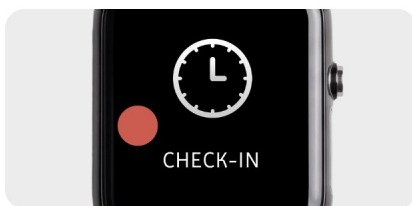


Touch screen

- ⦿ Double tap to wake
- 👆 Press and hold to perform a check-in

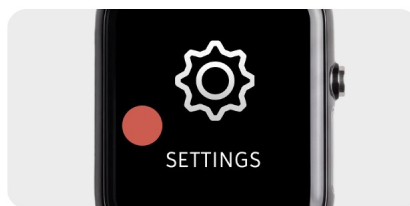

Settings

- 👆 Tap to enter settings menu
- 👆 Swipe up/down to access sub-menus

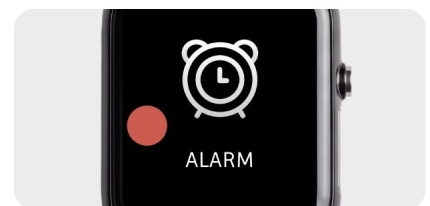

Alarm

- 👆 Tap to configure reminder alarms

Check-in system

1. When active, you must check-in at set intervals.
2. To perform a check-in, swipe up to the check-in screen and press and hold the check-in icon. The device will beep and show Check-In Complete. If the Check-in fails to send, Check-In Failed will be displayed.
3. If you fail to check-in on time, a reminder will be sent, causing the unit to beep and display the message Check-In Due.
4. Acknowledge the reminder by tapping the screen.
5. You must check-in after receiving a reminder.
6. Failure to check-in after receiving a reminder will raise a failed to check-in alarm.
 - Activated with 2 check-ins within 20 secs
 - Deactivated with 3 check-ins within 20 secs
 - Suspended when the unit is on charge
 - Alarms are raised even when the unit is offline

SOS Procedure

1. SOS button is pressed for 3 seconds and the unit vibrates.
2. Control room will call to the duress unit and ask for a voice code. User of the unit will answer with a VOICE CODE.
3. If the response indicates ALL CLEAR, the operator will verify the identity of the respondent with questions about the service.
4. If the response indicates DURESS, the operator will contact police and notify the Manager.
5. If there is NO RESPONSE, the operator will call the paired mobile phone. If there is no answer the SOS will proceed and the operator will call nominated emergency contacts.

NOTE: If the Duress unit is turned off after the SOS button is pressed, the SOS procedure will proceed.